

# Data Sheet Manganese


**KOOMAX**  
www.koomax.com

## Data Sheet for R6/AA


TYPE	R6/AA		Dimensions (mm)						
	R6P	R6PU							
STANDARD			<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>A</td> <td>50.0±0.5</td> </tr> <tr> <td>Φ</td> <td>Φ14.0±0.3</td> </tr> <tr> <td>G</td> <td>Min 1.6</td> </tr> </table>	A	50.0±0.5	Φ	Φ14.0±0.3	G	Min 1.6
A	50.0±0.5								
Φ	Φ14.0±0.3								
G	Min 1.6								
Nominal Voltage	1.5 V								
Open-circuit voltage (V)	1.60~1.73								
Short-circuit Current (A)	≥3.6								
Package of single cell	Metal jacket								
Technological requirements	IEC60086-1/2/5								
Validity period	Three years								
Test Temperature	20±2°C								
Capacitance <sup>a</sup> (43 Ω -4h/d)	0.86Ah	0.96Ah							
Weight	16.8(g)	17.0(g)							

Note a : Within 60 days after being manufactured.


### Discharge Characteristics (10 Ω)

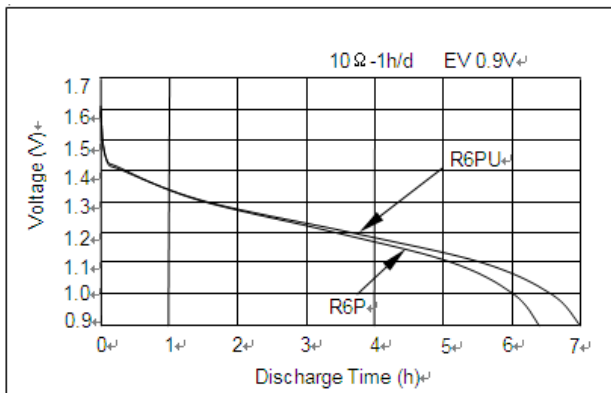


### Discharge Characteristics (43 Ω)

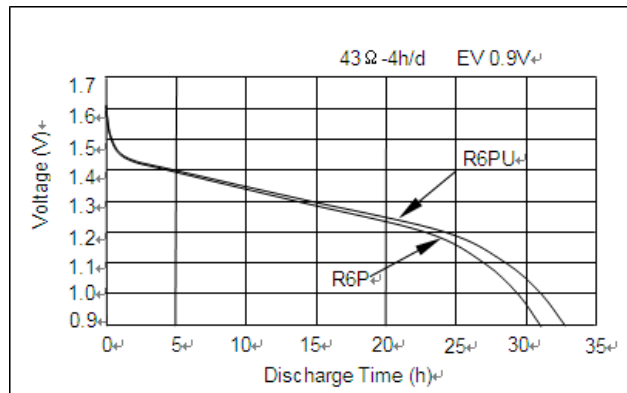

### Discharge Characteristics (1.8 Ω)

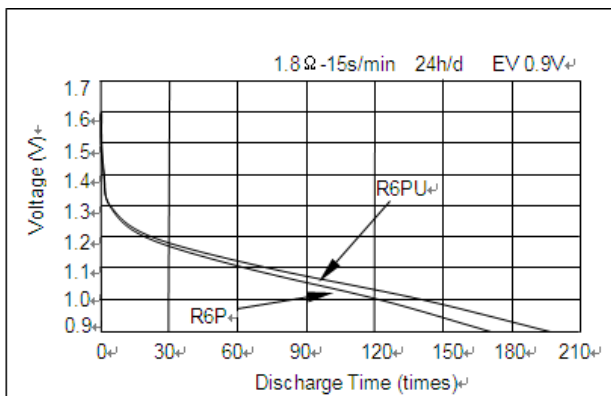

### Discharge Characteristics (3.9 Ω)

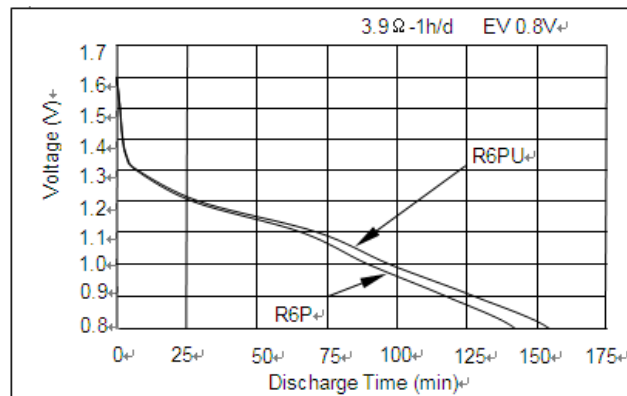

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.