
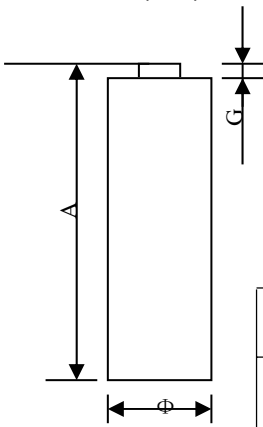


## Data Sheet for R14/SIZE C


TYPE	R14/SIZE C	Dimensions (mm) 							
STANDARD	R14PU								
Nominal Voltage	1.5 V								
Open-circuit voltage (V)	1.60~1.73								
Short-circuit Current (A)	≥4.5								
Package of single cell	Metal jacket								
Technological requirements	IEC60086-1/2/5								
Validity period	Three years								
Test Temperature	20±2°C								
Capacitance <sup>a</sup> (20 Ω -4h/d)	2.7Ah								
Weight	48(g)								
			<table border="1"> <tr> <td>A</td> <td>49.5±0.5</td> </tr> <tr> <td>Φ</td> <td>Φ25.8±0.3</td> </tr> <tr> <td>G</td> <td>Min 1.5</td> </tr> </table>	A	49.5±0.5	Φ	Φ25.8±0.3	G	Min 1.5
A	49.5±0.5								
Φ	Φ25.8±0.3								
G	Min 1.5								

Note a : Within 60 days after being manufactured.


### Discharge Characteristics (6.8 Ω)

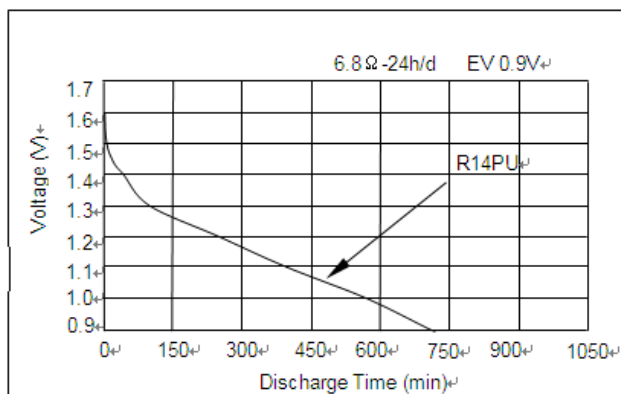


### Discharge Characteristics (20 Ω)

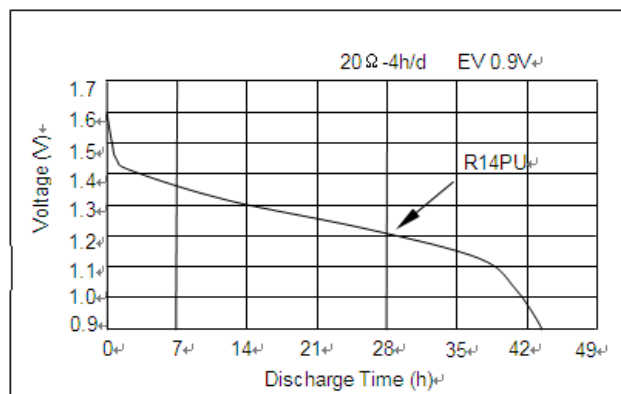

### Discharge Characteristics (3.9 Ω)

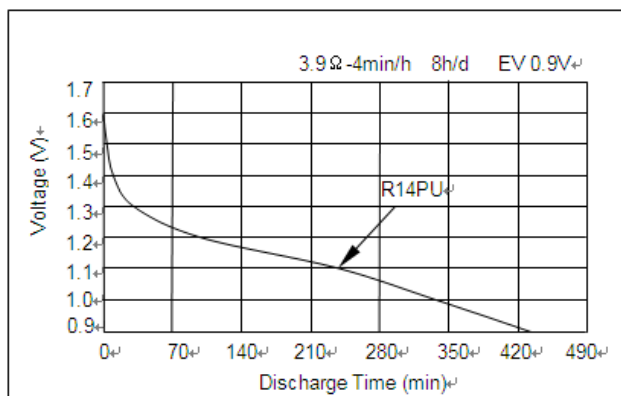

### Discharge Characteristics (3.9 Ω)

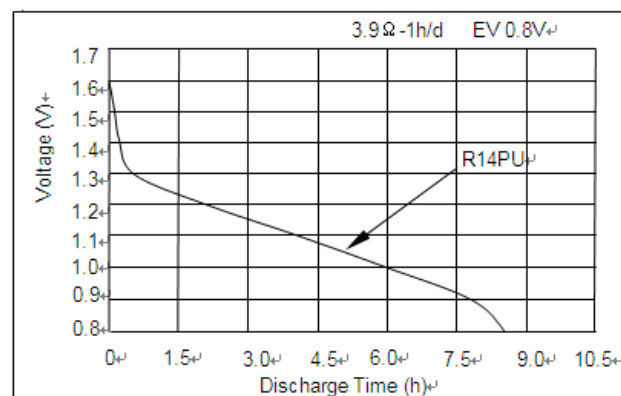

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.