

Data Sheet Manganese


KOOMAX
www.koomax.com

Data Sheet for R20/SIZE D


TYPE	R20/SIZE D		Dimensions (mm)						
STANDARD	R20P	R20PU							
Nominal Voltage	1.5 V		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>A</td> <td>60.5±0.5</td> </tr> <tr> <td>Φ</td> <td>Φ33±0.5</td> </tr> <tr> <td>G</td> <td>MAX 1.8</td> </tr> </table>	A	60.5±0.5	Φ	Φ33±0.5	G	MAX 1.8
A	60.5±0.5								
Φ	Φ33±0.5								
G	MAX 1.8								
Open-circuit voltage (V)	1.60~1.73								
Short-circuit Current (A)	≥7.0								
Package of single cell	Metal jacket								
Technological requirements	IEC60086-1/2/5								
Validity period	Three years								
Test Temperature	20±2°C								
Capacitance ^a (10 Ω -4h/d)	4.6Ah	6.3Ah							
Weight	93 (g)	95(g)							

Note a : Within 60 days after being manufactured.


Discharge Characteristics (3.9 Ω)

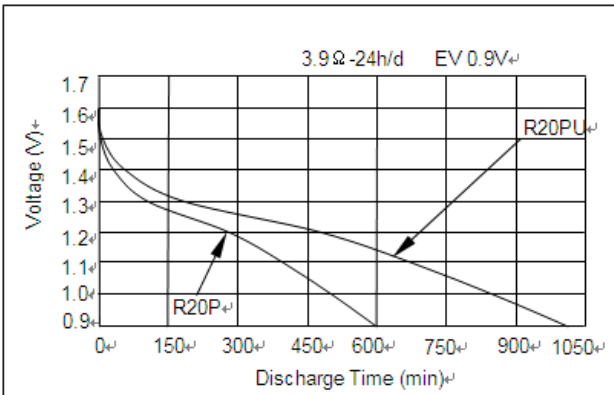


Discharge Characteristics (10 Ω)

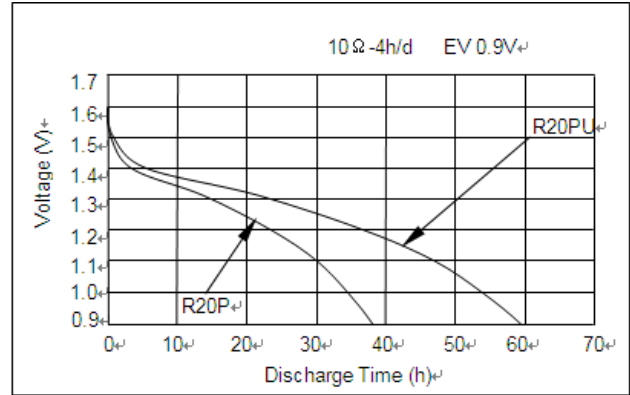

Discharge Characteristics (2.2 Ω)

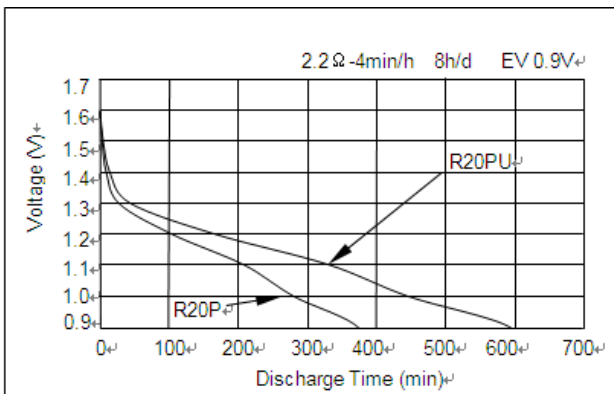

Discharge Characteristics (2.2 Ω)

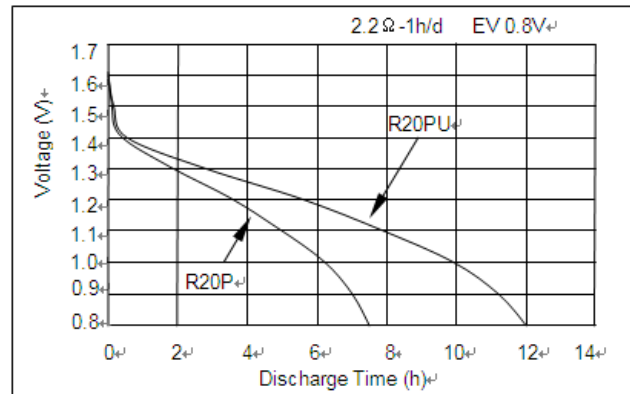

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.