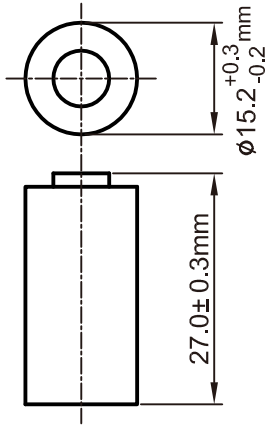


# Data Sheet CR Cylindrical


**KOOMAX**  
www.koomax.com

## Data Sheet for CR2


Nominal Voltage	3 V	Dimensions (mm) 
Nominal Capacity	850 mAh	
Weight	11 (g)	
Continuous Standard Load	10 mA	
Cut off Voltage	2.0V	
Maximum Continuous Discharge Current	800mA	
Maximum Pulse Discharge Current	1500mA	
IEC	CR15H270	
Operating Temperature	-40~+70°C *	

\*Please consult Koomax for use below and above -20°C to +60°C.


Discharge Characteristics

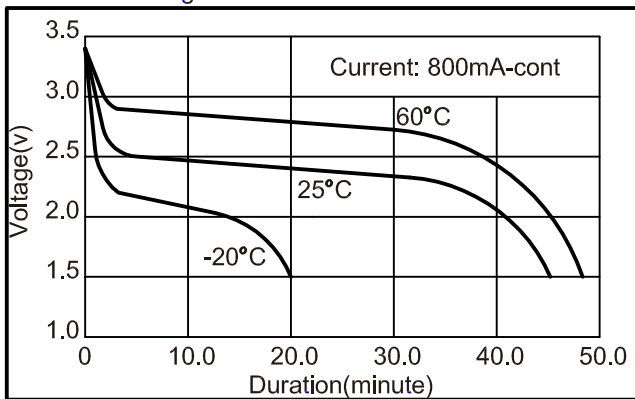


Discharge Characteristics

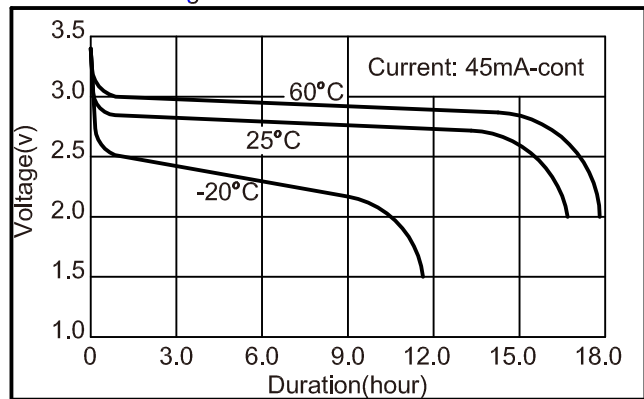

Pulse Discharge Characteristics

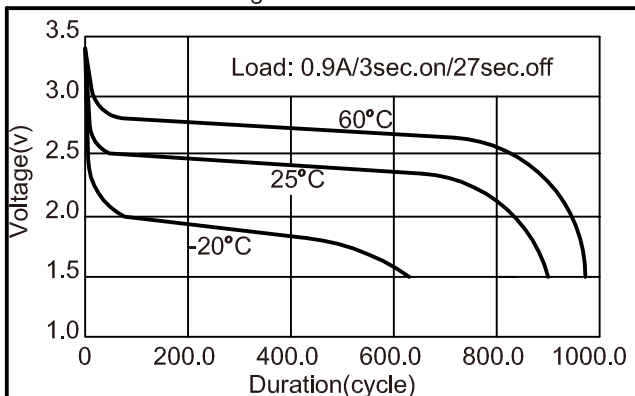

Discharge Characteristics

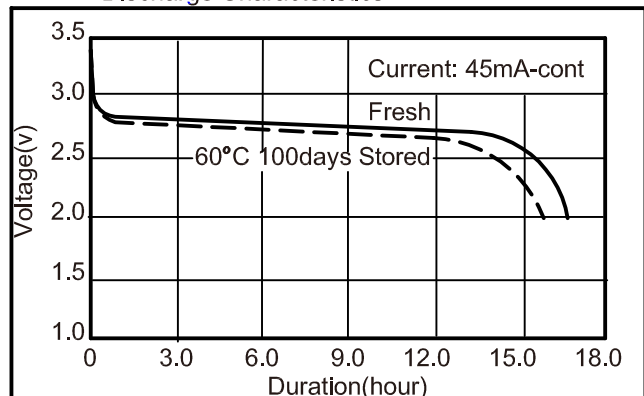

### WARNING:

- Do not charge, disassemble, heat above 100°C or incinerate.
- Do not mix fresh batteries and used batteries or other types of battery together.
- Do not short circuit.

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.