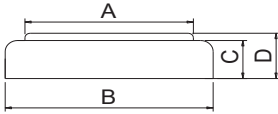


# Data Sheet Lithium Coin

**KOOMAX**  
www.koomax.com


## Data Sheet for CR1632

Nominal Voltage	3 V	Dimensions (mm)  
Nominal Capacity	130 mAh	
Standard Load	30 KΩ	
Standard Current	0.2 mA	
Max. Continuous Current	1 mA	
Max Pulse Current	8 mA	
Operating Temperature	-20~60°C	
Weight	1.8 (g)	
Chemistry	Lithium / Manganese Dioxide	
UL Certification	MH10136	


A	$\Phi 13.53^{+0.01}_0$
B	$\Phi 16.00^{+0.15}_0$
C	$2.86^{+0.02}_{-0.02}$
D	$3.20^{+0.2}_0$

Note: Capacity 130mAh is obtained at standard cc load to 2.0V at 23°C.


### Discharge Characteristics

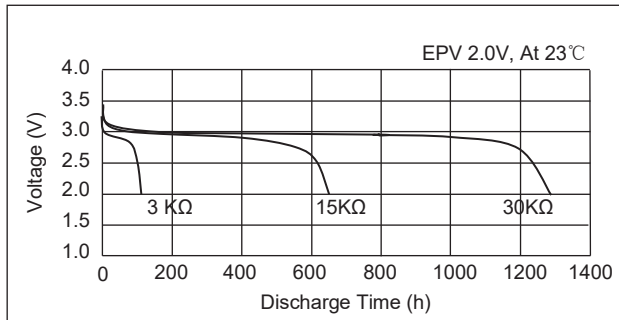


### Temperature Characteristics

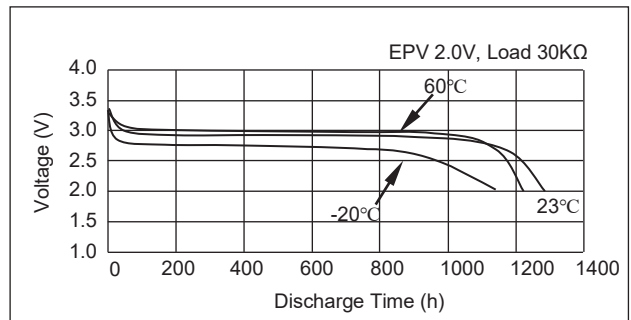

### Pulse Discharge Characteristics

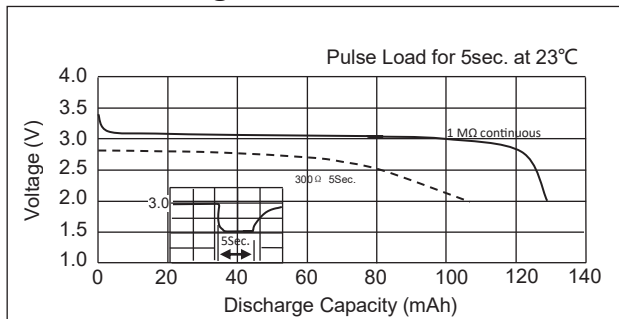

### Load vs. Capacity

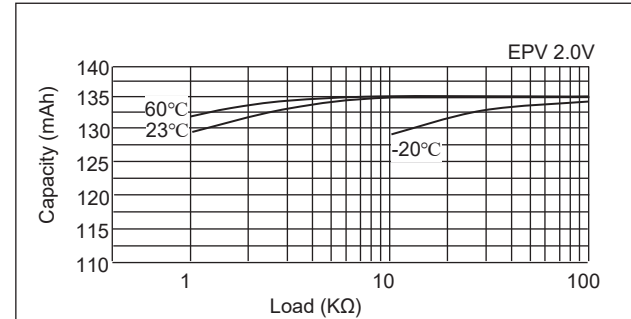

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.