
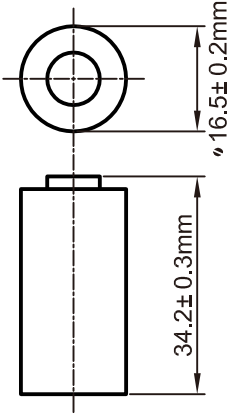


Data Sheet for CR123A


| | | |
|--------------------------------------|-------------|--|
| Nominal Voltage | 3 V | Dimensions (mm)  |
| Nominal Capacity | 1600 mAh | |
| Weight | 16.5 (g) | |
| Continuous Standard Load | 1 mA | |
| Cut off Voltage | 2.0V | |
| Maximum Continuous Discharge Current | 1000mA | |
| Maximum Pulse Discharge Current | 3000mA | |
| IEC | CR17345 | |
| Operating Temperature | -40~+70°C * | |

*Please consult Koomax for use below and above -20°C to +60°C.


Discharge Characteristics

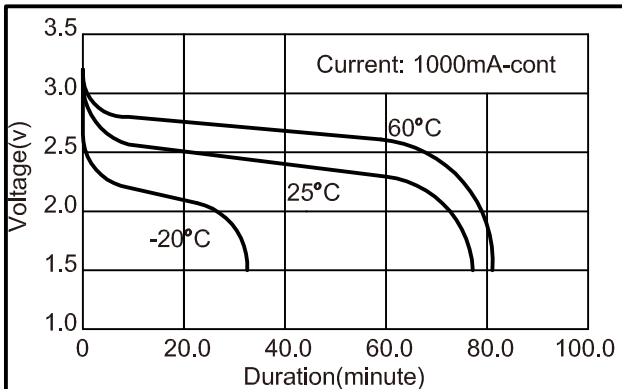


Discharge Characteristics

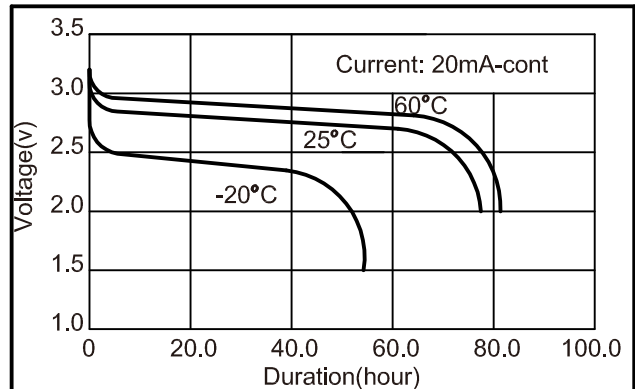

Pulse Discharge Characteristics

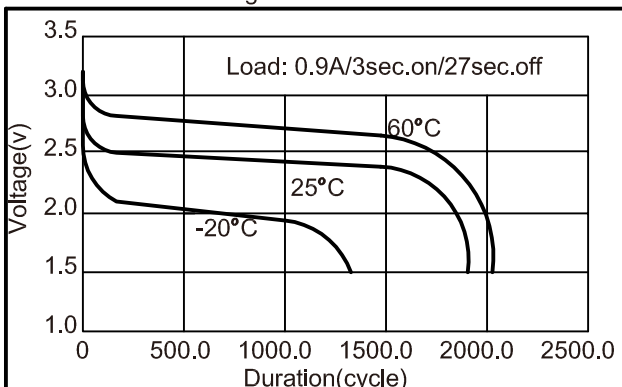

Discharge Characteristics

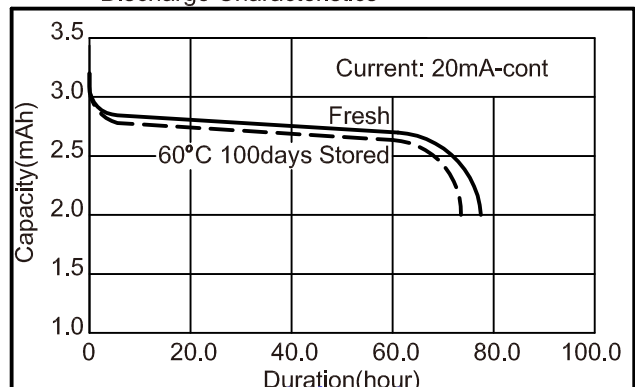

WARNING:

- Do not charge, disassemble, heat above 100°C or incinerate.
- Do not mix fresh batteries and used batteries or other types of battery together.
- Do not short circuit.

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.